


*Series OFM-W*

FARM MACHINERY  
**Domries**  
SINCE 1924  
STEEL FABRICATION

**WHEEL TYPE  
OFFSET DISC HARROWS**

**SEMI  
FINISH DISC  
WING FOLD**

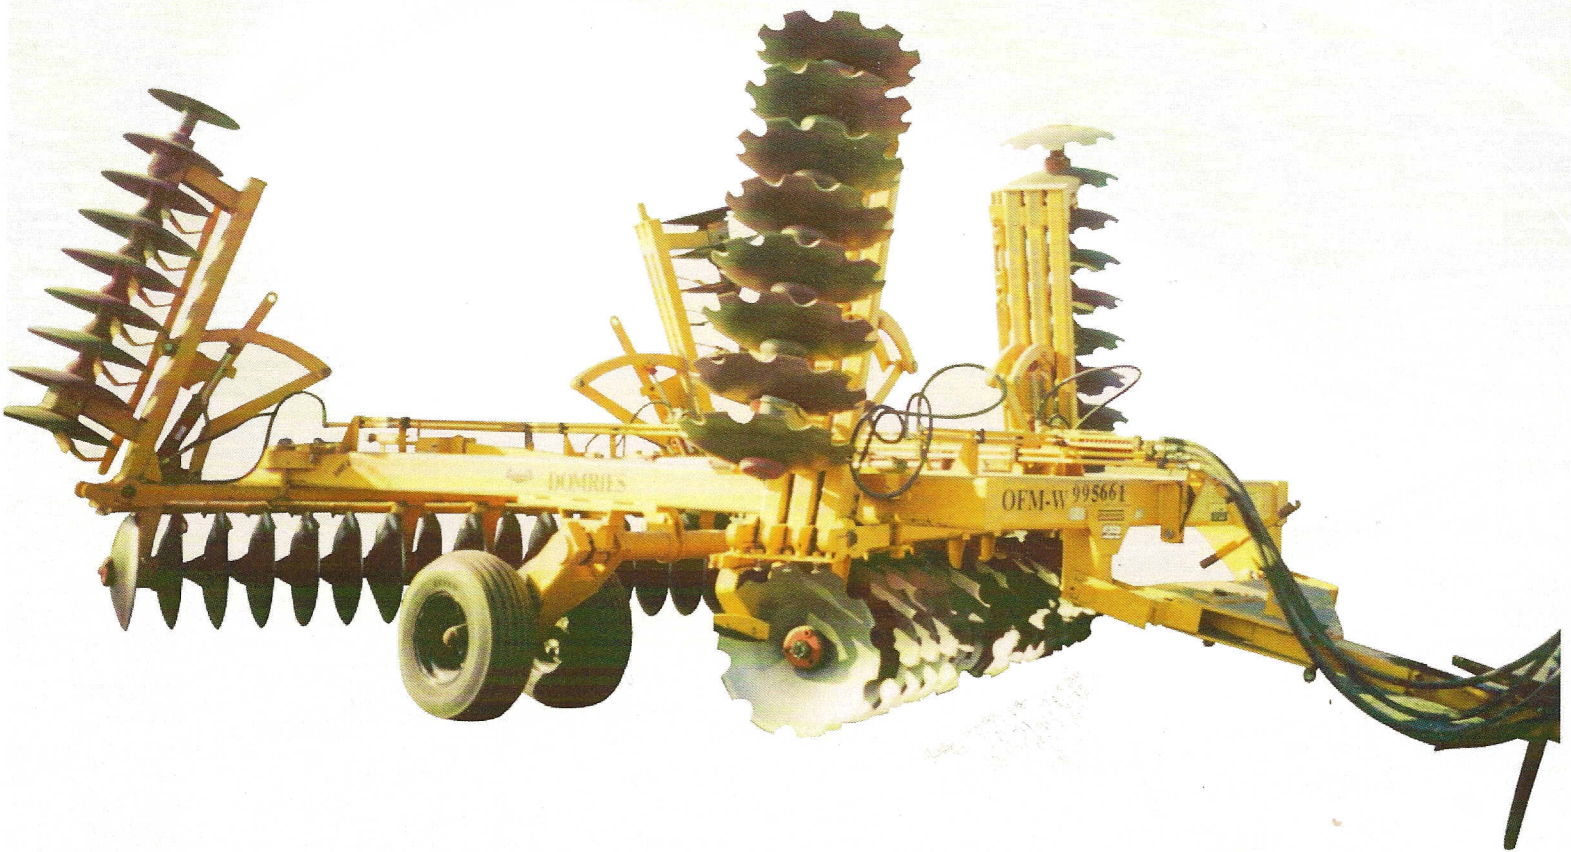

DOMRIES ENTERPRISES, INC.  
12281 Road 29  
Madera, California  
Phone (559) 673-9143  
Fax (559) 673-4110  
<http://www.domriesentinc.com>



*The Deluxe Disc*



# SPECIFICATIONS

## MODEL OFM - W - 99

| 86" FRAMES        |                       |               |                 |           |                |                         |          |           |
|-------------------|-----------------------|---------------|-----------------|-----------|----------------|-------------------------|----------|-----------|
| MODEL DESIGNATION | A.S.A.E. WIDTH OF CUT | NO. OF BLADES | WORKING WEIGHTS |           |                | *APPROX. DRAW BAR POWER |          |           |
|                   |                       |               | MACHINE         | PER BLADE | PER FT. OF CUT | HP/4 MPH                | HP/6 MPH | LBS. PULL |
| OFN-W-99-5660     | 21'0"                 | 56            | 11,371          | 203       | 541            | 158                     | 208      | 12,849    |
| OFM-W-99-6460     | 24'0"                 | 64            | 12,249          | 191       | 510            | 180                     | 238      | 13,841    |
| OFM-W-99-7260     | 27'0"                 | 72            | 15,027          | 208       | 556            | 202                     | 267      | 16,980    |
| OFM-W-99-8060     | 30'0"                 | 80            | 15,625          | 195       | 520            | 225                     | 297      | 17,656    |

### Features

**GANG BEARINGS** NON-RELUBE BALL BEARINGS IN TRUNION MTD HOUSINGS. SELF ALIGNING TRIPLE LIP SEAL.

**GANG RODS** 1 1/2" SQ. HI CARBON STEEL

**WHEEL BEARINGS** HEAVY 8,000 LB. RATED HUBS MFG. BY DOMRIES WITH TWO GREASE SEALS AND A GREASE BARRIER. AXLES ARE SLIP-IN TYPE WITH LOCKING CROSS BOLT. BEARINGS ARE REGREASABLE WITH GREASE ZERK.

**DISC BLADES** HIGH QUALITY BELLOTA BLADES WITH CROSS ROLLED STEEL MFG. IN THE U.S.A. 26 x 1/4 BLADES IS STD. EQUIPMENT.

**BLADE SPACING** 9 - 10 1/2 - 12 INCH.

**TAPERED DISCS** TWO DECREASING DIAMETER BLADES ON RT. REAR GANG ARE STD. EQUIPMENT.

**HYDRAULICS** 4" BORE WITH 16" STROKE 3" x 12" WING CYLINDERS, HYDRAULIC HOSES -STANDARD EQUIPMENT WITH 2.5 x 4 CYLINDER FOR STANDARD WING LOCK DOWN.

**HITCH** A SERIES OF HOLES IN THE DOUBLE HITCH PLATES ALLOWS FAST ONE-BOLT OFFSET ADJUSTMENT. THE SINGLE TUBE DESIGN PERMITS SHORTER TURNS BEHIND DUAL WHEEL TRACTOR.

**TONGUE JACK** STD. EQUIPMENT CLAMP-ON TYPE

**FRAME** 4 X 8 STEEL TUBE BRACED AND ELECTRIC WELDED

**GANG ANGLE SET BARS** ANGLES FROM 16. TO 30. WITH NON SLIP SET BARS AND DROP PINS WITH GANG LOCKS.

**LEVELING LINKAGE** KEEPS DISC LEVEL IN ALL STAGES FROM DISCING TO TRANSPORT. EASY ADJUSTMENT TO TRACTOR HITCH HEIGHT IS MADE WITH FRONT OF FRAME TOP LINK. ALL SETTINGS ARE CUSHIONED FROM SHOCK BY THREE HEAVY COMPRESSION SPRINGS.

**TRANSPORT SAFETY** A HEAVY CROSS PIN TAKES ALL OF THE MACHINE WEIGHT OFF OF THE HYDRAULIC CYLINDER WHEN TRANSPORTING. DOMRIES SCISSOR LINKAGE ALLOWS FULL FREEDOM OF CYLINDER MOVEMENT WITHOUT DAMAGE TO DEPTH CONTROL. WHEN NOT IN USE PIN HAS A STORAGE RACK.



**DOMRIES ENTERPRISES, INC.**

12281 Road 29

Madera, California 93638

Phone (559) 673-9143 .FAX (559) 673-4110

Visit our website @ <http://www.domriesentinc.com>

SOLD BY

