

FARM MACHINERY
Domries
SINCE 1924
STEEL FABRICATION

**WHEEL TYPE
OFFSET DISC HARROWS**

*The Disc
that has it all*

BTO


SERIES I



BTO-10-2241
8'5"


CUTTING WIDTHS
7'0"
TO
10'0"

DOMRIES ENTERPRISES, INC.
12281 Road 29
Madera, California
Phone (559) 673-9143
Fax (559) 673-4110
<http://www.domriesentinc.com>



The Deluxe Disc

MODEL BTO SERIES I

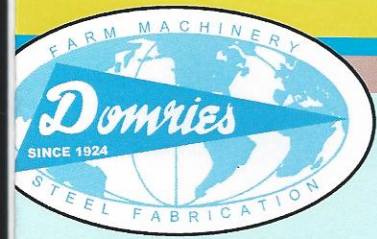

70'0" TO 9'11"



THE DISC TO THE
BE USED TO
TO REAR TO



OFFSETTING THE DISC CAN BE DONE VERY QUICK
AND EASY WITH WRENCHES.



OPTIONAL HEAVY DUTY SCRAPERS

Domries

MO

STANDARD FEATURES

DISC BEARING TRIPLE SEALED BALL BEARINGS MOUNTED IN A HEAVY CAST IRON TRUNION TYPE HOUSING.

SPACER SPOOLS ALL STEEL FABRICATED 9" SPACERS AND HALF SPOOLS.

WHEEL BEARINGS DOMRIES DESIGNED H.D. 5000 LB. HUB WITH 2 SEALS AND A REPLACEABLE SEAL WEAR SLEEVE.

SIDE LEVELING TWIN AXLES ALLOW SIDE LEVELING OF CUT WITH A FEW TURNS RIGHT OR LEFT OF CRANK.

LEVELING LINKAGE KEEPS DISC LEVEL IN ALL STAGES FROM DISCING TO TRANSPORT. EASY ADJUSTMENT TO TRACTOR HITCH HEIGHT IS MADE WITH THE FRONT OF FRAME TOP LINK. ALL SETTINGS ARE CUSHIONED FROM SHOCK BY TWO HEAVY COMPRESSION SPRINGS.

TRANSPORT SAFETY A HEAVY CROSS PIN TAKES ALL OF THE MACHINE WEIGHT OFF OF THE HYDRAULIC CYLINDER WHEN TRANSPORTING. DOMRIES SCISSOR LINKAGE ALLOWS FULL FREEDOM OF CYLINDER MOVEMENT WITHOUT DAMAGE TO DEPTH CONTROL.

GANG RODS 1 1/2" SQUARE HI CARBON STEEL

TIRES 7.60 x 15 x 6 PLY RIBBED IMPLEMENT.

HYDRAULIC CYLINDER 3 x 12 TIE ROD CONSTRUCTION

HITCH QUICK SET PULL PIN IN TELESCOPING TUBES MAKE OFFSETTING QUICK AND SIMPLE.

GANG BEAMS HEAVY WALL STEEL TUBE WITH SWEEP BACK BEARING BRACKETS WELDED INTO A MASSIVE BEAM WILL SHED TRASH AND PLOW THROUGH YOUR TOUGHEST JOBS.

BLADE EXTENSIONS WASHERS ARE PROVIDED AT ALL GANG ENDS FOR OPTIONAL EXTENSIONS.

TONGUE A SINGLE LIP IS STD. A "U" IS AT YOUR OPTION.

BLADES 24" ARE STANDARD. 26" AT YOUR OPTION.

OPTIONS

- 9.5L FLOTATION TIRES
- BLADE CLEANERS
- 26" BLADES
- BLADE COMBINATIONS
- RE-LUBE BEARING
- REAR HITCH
- ADD A BLADE EXTENSIONS
- DOUBLE LIP TONGUE



THE RUGGED TOP LINK LEVELS THE TRACTOR HITCH. LINK CAN ALSO TRANSFER WEIGHT FROM FRONT TO FRONT.



SINGLE TONGUE HITCH IS STANDARD
DOUBLE LIP IS OPTIONAL



DEPT CONTROL SETBAR WITH TRANSPORT SAFETY
PIN IN PLACE.



HEAVY DUTY WEAR PLATE AND ADD-A-BLADE
EXTENSION WASHER IS STANDARD EQUIPMENT.

SPECIFICATIONS

BTO SERIES I

MODEL ORDER NO.	APPROX. CUT	A.S.A.E. WIDTH OF CUT	APPROX. HP. REQ.	NO. OF BLADES	SIZE BLADES	*BLADE EDGE FRONT REAR	NO. OF BLADES FRONT REAR	APPROX. WT. LBS.
BTO-10-1840	7'0"	18	24"	SM	SM	9	9	3419
BTO-10-1860	7'1"	18	26"	SM	SM	9	9	3510
BTO-10-2040	7'9"	20	24"	SM	SM	10	10	3522
BTO-10-2060	7'10"	20	26"	SM	SM	10	10	3623
BTO-10-2240	8'5"	22	24"	SM	SM	11	11	3625
BTO-10-2260	8'6"	22	26"	SM	SM	11	11	3737
BTO-10-2440	9'2"	24	24"	SM	SM	12	12	3728
BTO-10-2460	9'3"	24	26"	SM	SM	12	12	3850
BTO-10-2640	9'11"	26	24"	SM	SM	13	13	3831
BTO-10-2660	10'0"	26	26"	SM	SM	13	13	3963

*See price sheet for Notched and Smooth Blade Combinations.

Design Material and/or Specifications are Subject to Change without Notice and without Liability therefore.



DOMRIES ENTERPRISES, INC.

12281 Road 29

Madera, California 93638

Phone (559) 673-9143 .FAX (559) 673-4110

Visit our website @ <http://www.domriesentinc.com>

SOLD BY

