

FARM MACHINERY

Domries

SINCE 1924

STEEL FABRICATION

WHEEL TYPE

OFFSET DISC HARROWS

VTL & VTH SERIES

**CUTTING
WIDTHS**

6'6"

TO

9'8"



VTL & VTH

**A REAL PAIR
TO DRAW TO**

**VTL
HEAVY DUTY**

**VTH
EXTRA
HEAVY DUTY**

DOMRIES ENTERPRISES, INC.

12281 Road 29

Madera, California

Phone (559) 673-9143

Fax (559) 673-4110

<http://www.domriesentinc.com>



The Deluxe Disc

Domries

STANDARD FEATURES



DROP PIN SET BAR FOR QUICK AND NON-SLIP SET OF GANG ANGLE OF 12" TO 28"



FINE TUNE CRANK CONTROL OF REAR GANGS TO ASSURE A FLAT AND SMOOTH FINISH.



TRUNBUCKLE LEVELS THE MACHINE TO THE TRACTOR HITCH. THE MACHINE WILL REMAIN LEVEL THRU ALL LIFTING STAGES.

OPTIONS

- BLADE CLEANERS
- BLADE EXTENSIONS
- HYDRAULIC HOSES
- UTILITY HITCH
- DRAG BRACKETS
- BLADE OPTIONS
- TOOL BAR BRACKETS
- DIRT DEFLECTORS
- FLOTATION TIRES
- CLEVIS TONGUE
- DROP PIN WIDTH
- ADJUSTMENT FOR
- FRONT & REAR GANGS

VTL A RUGGED TUBULAR STRUCTURED FRAME IS DESIGNED AND ENGINEERED TO WITHSTAND NORMAL RIGORS OF AVERAGE VINEYARD

LOW PROFILE ★ VI


VTL & VTH

MODEL


VTL

VTH

x	3X3 Heavy Wall Steel Tube Frame	
	4x4 Heavy Wall Steel Tube Frame	x
x	Trunion Type Tripple Sealed Bearings	x
x	1 1/8" Square Plow Steel Gang Rods	
	1 1/2" Square Plow Steel Gang Rods	x
x	Heavy Cast Iron Spacer Spools	x
x	9" Blade Spacing	x
x	22" x 8 Ga. Smooth or Notched Blades	
x	24" x 7 Ga. Smooth or Notched Blades	
	24" x 5mm Smooth or Notched Blades	x
x	5000 Lb. Rated Wheel Hubs	x
x	Double Sealed Wheel Hubs	x
x	Slip in Wheel Spindles	x
x	Wear Sleeves For Seals	x
x	15 x 6 Wheels with 6 Lug Bolts	x
x	7.60 x 15 x 6 Ply Tires	x
x	Front Gang, Drop Pin Angle Setting	x
x	Rear Gang, Fine Tune Crank Control	x
x	12" to 28" Gang Angle Range	x
x	3 x 12 Hydraulic Cylinder	x
x	Pin Setting For Depth Control	x
x	Leveling Control System	x
x	Hitch Leveling Turnbuckle	x
x	Shock Cushioning Springs	x
x	Hose Guide	x
	Center Shank	

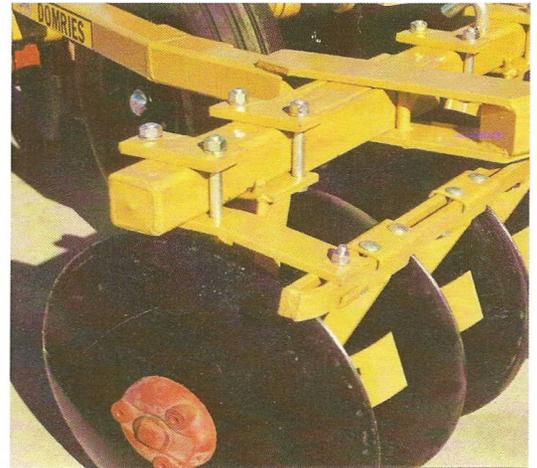

TRUNION TYPE SELF ALIGNING BEARING UNIT MOUNTED WITH A RUGGED BRACKET AND CLAMP ASSEMBLY.

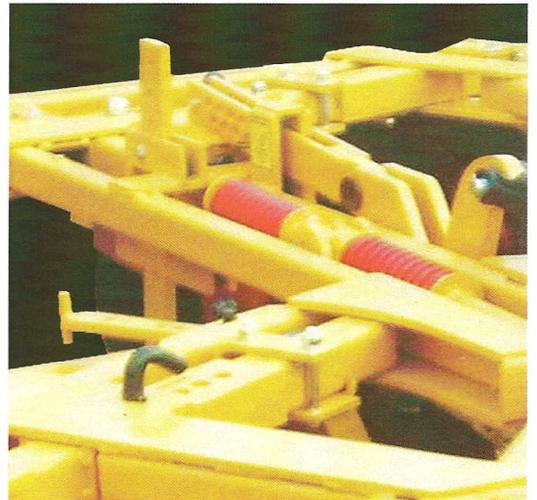

VIEW SHOW HEAVY 1X3 CENTER SHANK. SHOCK CUSHIONING SPRINGS AND DEPTH CONTROL SET BAR WITH TRANSPORT PIN.

VTH FOR THE FRAMER THAT HAS HEAVY SOIL CONDITIONS THAT ARE CONSIDERED ABOVE NORMAL AND REQUIRES A LARGE H.P. TRACTOR. ALSO FOR THE BIG ACREAGE OR COMMERCIAL OPERATIONS.

CON-
E THAT
ENGI-
STAND
OF THE
RD.

NEYARD TANDEM



SINGLE TONGUE HITCH IS STANDARD.
DOUBLE LIP AS AN OPTION.



HEAVY DUTY AXEL SHAFT WITH 4 LUBRICATABLE
BEARINGS.

SPECIFICATIONS

VTL

MODEL ORDER NO.	A.S.A.E. WIDTH OF CUT	NO. OF BLADES	SIZE BLADES	*BLADE EDGE		NO. OF BLADES		APPROX. WT. LBS.
				FRONT	REAR	FRONT	REAR	
VTL-99-1620	6'6"	16	22"	SM	SM	8	8	2520
VTL-99-1640	6'9"	16	24"	SM	SM	8	8	2623
VTL-99-1820	8'0"	18	22"	SM	SM	8	10	2579
VTL-99-1840	8'2"	18	24"	SM	SM	8	10	2694
VTL-99-2020	8'0"	20	22"	SM	SM	10	10	2637
VTL-99-2040	8'2"	20	24"	SM	SM	10	10	2765
VTL-99-2220	9'5"	22	22"	SM	SM	10	12	2699
VTL-99-2240	9'7"	22	24"	SM	SM	10	12	2839
VTL-99-2420	9'5"	24	22"	SM	SM	12	12	2760
VTL-99-2440	9'7"	24	24"	SM	SM	12	12	2913

VTH

VTH-100-1640	6'9"	16	24"	SM	SM	8	8	3900
VTH-100-1840	8'2"	18	24"	SM	SM	10	10	3980
VTH-100-2040	8'2"	20	24"	SM	SM	10	10	4060
VTH-100-2240	9'8"	22	24"	SM	SM	10	12	4161
VTH-100-2440	9'8"	24	24"	SM	SM	12	12	4263

*See price sheet for Notched and Smooth Blade Combinations.
Design Material and/or Specifications are Subject to Change without Notice and without Liability therefore.



DOMRIES ENTERPRISES, INC.

12281 Road 29

Madera, California 93638

Phone (559) 673-9143 .FAX (559) 673-4110

Visit our website @ <http://www.domriesentinc.com>

SOLD BY

