



TANDEM DISC HARROWS

XTRA HEAVY DUTY


Deluxe
and
RUGGED

The Deluxe


- ★ Fine Adjustments!
- ★ Easy Angle Setting By Crank
- ★ Quick Width Adjustments
- ★ Master Pin Setting
- ★ Roller Bearing Wheels
- ★ Triple Sealed Ball Bearing
- ★ Fine Depth Control
- ★ Perfect Balance
- ★ TurnBuckle Adjustable Hitch
- ★ Grease Fittings On All Threads
- ★ Down Pressure Front Or Rear

THE RUGGED

- ★ Massive Strength Of Box And Heavy Angle Iron Frame
- ★ Bolted And Welded Construction
- ★ Axle, Solid 3" Round Steel
- ★ 1 1/2" Sq. Hi Tensile Steel Gang Rods
- ★ Heavy Cast Iron Spools and Housings
- ★ Truck Type Wheels
- ★ 7.50 X 20 Ribbed Imp. Tires
- ★ Reinforced Stress Points
- ★ Large Threaded Adjusting Rods

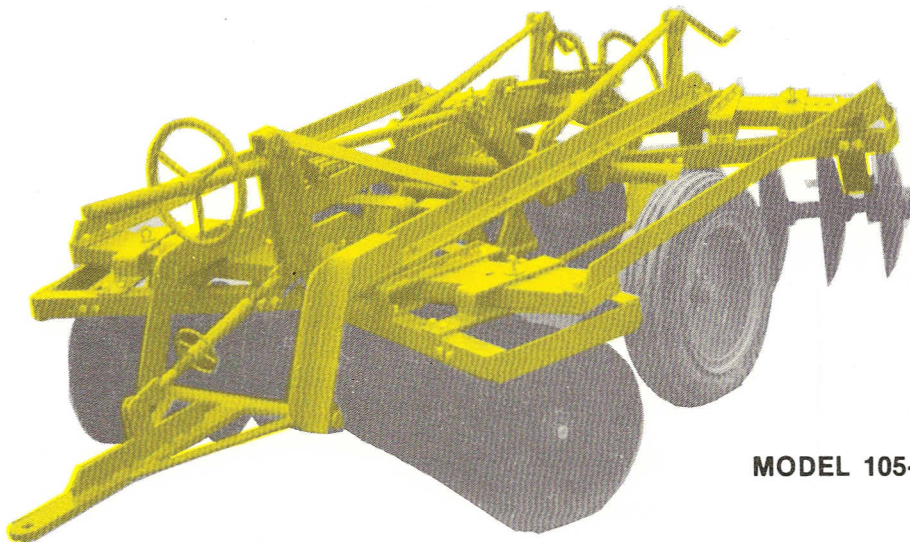

MODEL 105-J

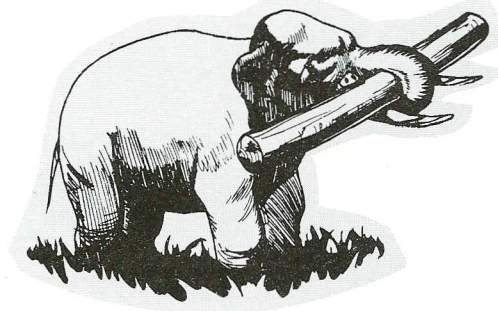

DOMRIES JUMBO DISC

- For The Toughest Conditions.
- Rugged Enough To Withstand The Extra Power Of The Larger Tractors.
- Yet, Can Be Worked With The Medium Sized Tractors As It Has All Ball And Roller Bearing Working Parts.


DOMRIES ENTERPRISES INC.

12281 Road 29
Madera, California 93637




DOMRIES JUMBO

STANDARD FEATURES

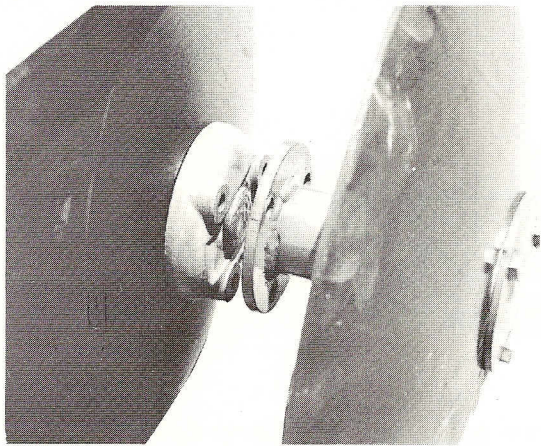

ADD A BLADE EXTENSION

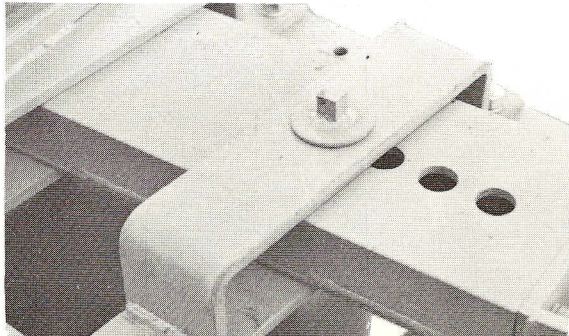

WIDTH OF CUT SETTING WITH PULL PIN

- **GANG RODS** — 1 1/2" Square Hi Tensile Steel
- **DISC BEARING** — Triple Sealed Ball Bearing
- **TIRES** — 7:50 x 20 Ribbed Implement
- **AXEL** — 3" Solid Steel
- **HYDRAULIC CYLINDER** — 3" x 12" Hi Pressure
- **WASHERS** — Drilled and Tapped for Add-A-Blade Extensions
- **GANG ANGLE SETTING** — Threaded Crank Controls
- **DEPTH CONTROL** — Threaded Wheel Control
- **HITCH CONTROL** — Threaded Turnbuckle
- **CENTER SHANK** — For Cutting Center Ridge
- **NEW! WHEEL BEARING PROTECTION** — 2 Sets of Seals • Seal Wear Sleeve • Grease Barrier
- **HYDRAULIC PLUMBING** — Up to Hitch

OPTIONAL EQUIPMENT

- ★ Notched Blade Combinations
- ★ Add-A-Blade Extensions
- ★ Cleaners
- ★ Tool Bar Mounting Brackets
- ★ Adjustable Drag Links
- ★ Dust Protectors

Domries Series J Extra Heavy Duty Tandem Disc Harrows

MODEL NO.	WIDTH	NUMBER OF BLADES		SIZE GANG RODS	SIZE BLADES	BLADE SPACING	APPROX. WT. LBS.
		FRONT	REAR				
1040-J	6'6"	4	4	1 1/2" Sq.	24"	9"	3900
1045-J	8'0"	4	5	1 1/2" Sq.	24"	9"	3900
105-J	8'0"	5	5	1 1/2" Sq.	24"	9"	4100
1056-J	9'6"	5	6	1 1/2" Sq.	24"	9"	4300
106-J	9'6"	6	6	1 1/2" Sq.	24"	9"	4500
107-J	11'0"	7	7	1 1/2" Sq.	24"	9"	4800

ALL MODELS LISTED ABOVE HAVE SMOOTH BLADES



DOMRIES ENTERPRISES INC.
 12281 Road 29
 Madera, California 93637

SOLD BY

